




## UCP 309-27 F

Plummer block housing unit P type, Cast iron housing, Set screw locking spherical ball bearing, F type seal

## Техническая информация

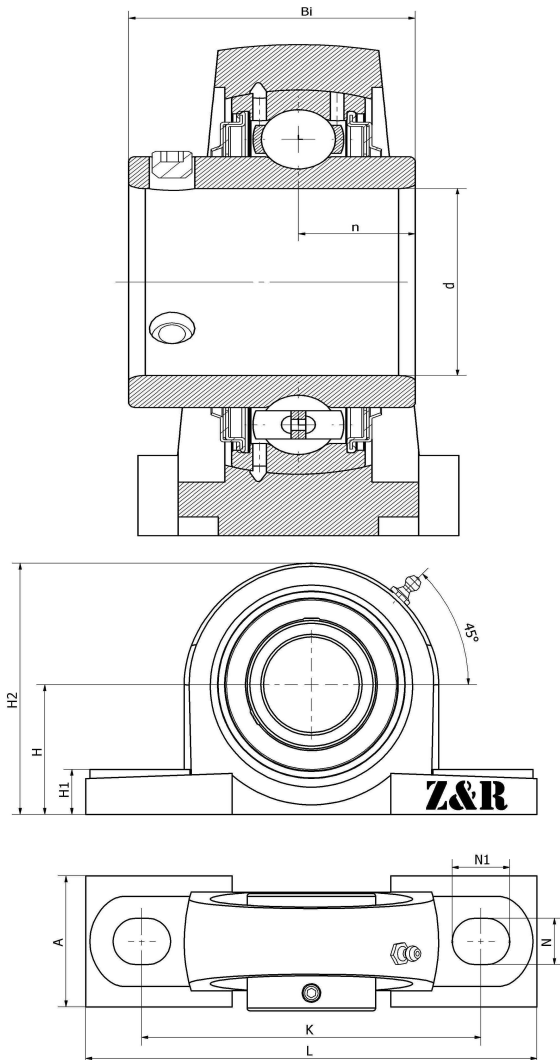

### Основные размеры и рабочие параметры

|     |           |                                |
|-----|-----------|--------------------------------|
| d   | 42.8625mm | Внутренний диаметр (отверстие) |
| H   | 67mm      | Center height                  |
| H1  | 24mm      | Base height                    |
| H2  | 129mm     | Overall height                 |
| A   | 67mm      | Base width                     |
| N   | 20mm      | Mounting hole length           |
| N1  | 30mm      | Mounting hole width            |
| L   | 245mm     | Общая длина                    |
| K   | 190mm     | Fixed hole distance            |
| Bi  | 57mm      | Total width                    |
| n   | 22mm      | channel distance               |
|     | M16       | Bolt size                      |
| ≈ m | 4.23Kg    | weight                         |
|     | UC309-27  | Bearing Type                   |
|     | P309-27   | Bearing seat model             |
|     | M6*1      | Oil injection hole             |
|     | J6        | Assembly torque                |
|     | HT200     | Bearing seat material          |

\*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。您可通过我们网站上的联系表了解更多信息。