




## UCT 326 F

Slider bearing housing unit T type, Cast iron housing, Set screw locking spherical ball bearing, T type seal

## Техническая информация

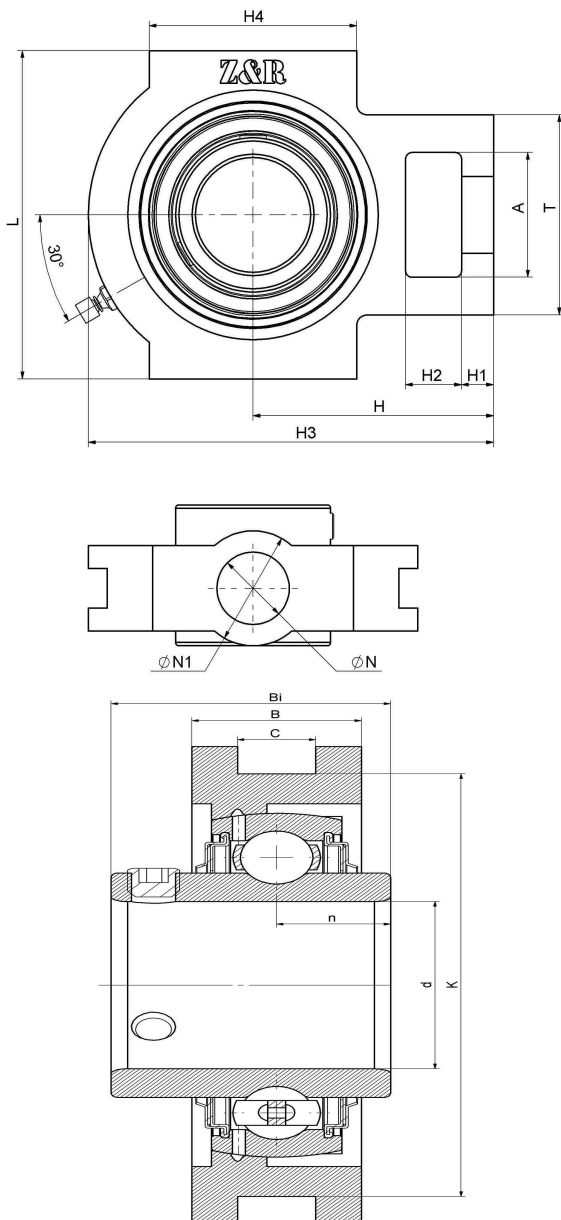

## Основные размеры и рабочие параметры

|        |        |                                   |
|--------|--------|-----------------------------------|
| d      | 130mm  | Внутренний диаметр (отверстие)    |
| K      | 350mm  | Guide groove distance             |
| L      | 385mm  | Общая длина                       |
| T      | 220mm  | Height of bearing seat fixed side |
| A      | 150mm  | Pocket height                     |
| n      | 54mm   | channel distance                  |
| C      | 50mm   | Guide groove width                |
| B      | 100mm  | Bearing seat width                |
| Bi     | 135mm  | Total width                       |
| H4     | 240mm  | Guide groove length               |
| H3     | 465mm  | Whole length                      |
| H2     | 65mm   | Pocket width                      |
| H1     | 45mm   | Fixed link length                 |
| H      | 285mm  | Axis distance                     |
| N      | 75mm   | Fixing holes                      |
| N1     | 150mm  | Width of bearing seat fixed side  |
| ≈m     | 68.4Kg | weight                            |
| UC326F |        | Bearing Type                      |
| T326   |        | Bearing seat model                |
| M6*1   |        | Oil injection hole                |
| J7     |        | Assembly torque                   |
| HT200  |        | Bearing seat material             |

\*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。您可通过我们网站上的联系表了解更多信息。

Контакты: E-mail: [mr.suo@zrbearing.net](mailto:mr.suo@zrbearing.net)

Тел.: 0319-5628888

Адрес: Китай, пров. Хэбэй, уезд Линьси,  
северная сторона кольцевой дороги Чэнбэй —  
Zhongda Bearing