




UCT 307-22 F

Slider bearing housing unit T type, Cast iron housing, Set screw locking spherical ball bearing, T type seal

Техническая информация

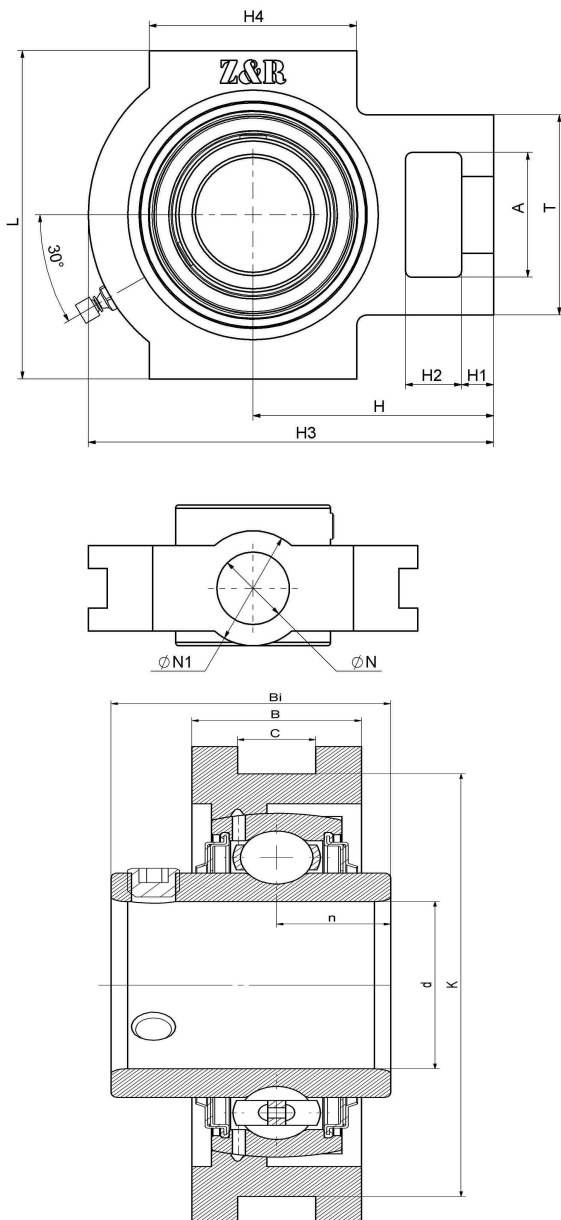

Основные размеры и рабочие параметры

d	34.925mm	Внутренний диаметр (отверстие)
K	100mm	Guide groove distance
L	111mm	Общая длина
T	75mm	Height of bearing seat fixed side
A	45mm	Pocket height
n	19mm	channel distance
C	16mm	Guide groove width
B	32mm	Bearing seat width
Bi	48mm	Total width
H4	80mm	Guide groove length
H3	150mm	Whole length
H2	20mm	Pocket width
H1	17mm	Fixed link length
H	94mm	Axis distance
N	30mm	Fixing holes
N1	45mm	Width of bearing seat fixed side
≈m	2.3Kg	weight
UC307-22F	Bearing Type	
T307-22	Bearing seat model	
M6*1	Oil injection hole	
J7	Assembly torque	
HT200	Bearing seat material	

*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。您可通过我们网站上的联系表了解更多信息。

Контакты: E-mail: mr.suo@zrbearing.net

Тел.: 0319-5628888

Адрес: Китай, пров. Хэбэй, уезд Линьси,
северная сторона кольцевой дороги Чэнбэй —
Zhongda Bearing