




## UCT 211-33 F

Slider bearing housing unit T type, Cast iron housing, Set screw locking spherical ball bearing, T type seal

## Техническая информация

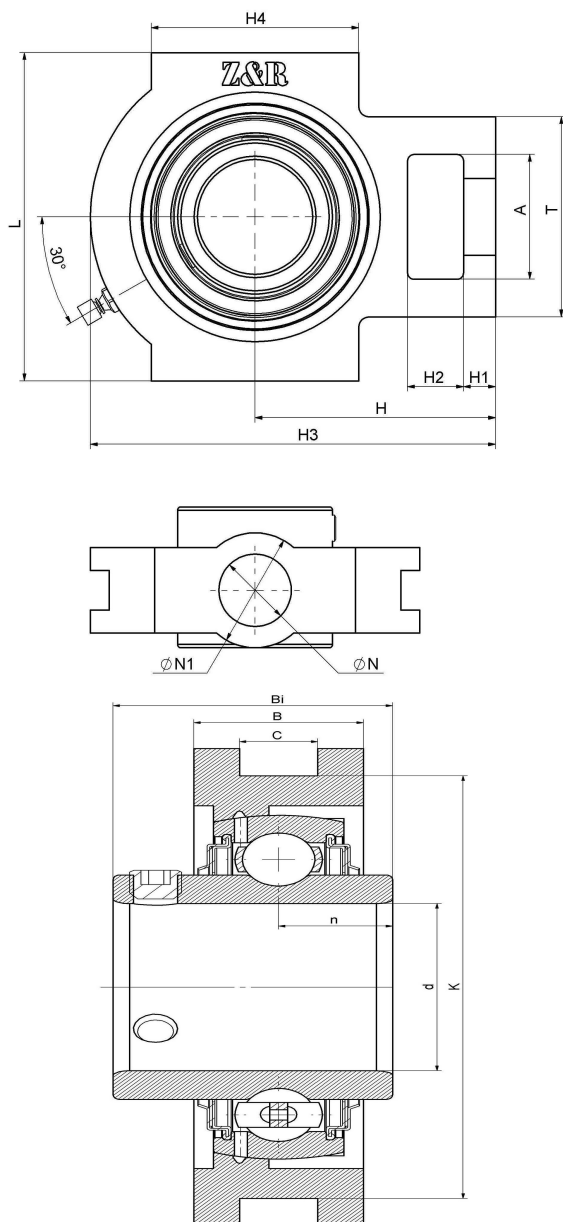

### Основные размеры и рабочие параметры

|           |           |                                   |
|-----------|-----------|-----------------------------------|
| d         | 52.3875mm | Внутренний диаметр (отверстие)    |
| K         | 130mm     | Guide groove distance             |
| L         | 146mm     | Общая длина                       |
| T         | 102mm     | Height of bearing seat fixed side |
| A         | 64mm      | Pocket height                     |
| n         | 22.2mm    | channel distance                  |
| C         | 22mm      | Guide groove width                |
| B         | 38mm      | Bearing seat width                |
| Bi        | 55.6mm    | Total width                       |
| H4        | 95mm      | Guide groove length               |
| H3        | 171mm     | Whole length                      |
| H2        | 25mm      | Pocket width                      |
| H1        | 19mm      | Fixed link length                 |
| H         | 106mm     | Axis distance                     |
| N         | 35mm      | Fixing holes                      |
| N1        | 64mm      | Width of bearing seat fixed side  |
| ≈ m       | 3.83Kg    | weight                            |
| UCT11-33F |           | Bearing Type                      |
| T211-33   |           | Bearing seat model                |
| M6*1      |           | Oil injection hole                |
| J7        |           | Assembly torque                   |
| HT200     |           | Bearing seat material             |

\*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。您可通过我们网站上的联系表了解更多信息。

Контакты: E-mail: [mr.suo@zrbearing.net](mailto:mr.suo@zrbearing.net)

Тел.: 0319-5628888

Адрес: Китай, пров. Хэбэй, уезд Линьси,  
северная сторона кольцевой дороги Чэнбэй —  
Zhongda Bearing