




DY5201349411X2

Agricultural machinery bearings

BDM ARMOR 2.0 IL50-120/6T-44-
R635-ED2

Техническая информация

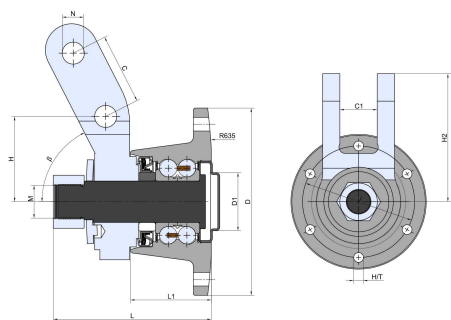

Основные размеры и рабочие параметры

J	Войдите, чтобы увидеть размеры	Pitch circle diameter
D	145mm	Наружный диаметр
D1	45mm	Centar bore on the disc
C	55mm	Distance between holes
C1	40mm	Disk harrow arm width
M	M27x2	Outher Thread
H/T	6xM12x1.75	Hole/Thread
H	68mm	Distance between the bearing axis and the mounting hole
H2	137.7mm	Distance between the bearing axis and the end of the holder
d1	17mm	Bore diameter
L	131.2mm	Total length
L1	62.2mm	Total flange length
R	635mm	The radius of the built-in disk
β	63kg	Angle of the holder
$\approx m$	6.08kn	weight
Cor	60kn	Radial dynamic load rating
Cr	45kn	Radial static load rating
Pu	1.93kn	Fatigue load limit

Контакты: E-mail: mr.suo@zrbearing.net

Тел.: 0319-5628888

Адрес: Китай, пров. Хэбэй, уезд Линьси,
северная сторона кольцевой дороги Чэнбэй —
Zhongda Bearing