

Z&R®





UCFG 210 R3CC

Agricultural machinery bearings

LEFG 210 TDT.H

Техническая информация

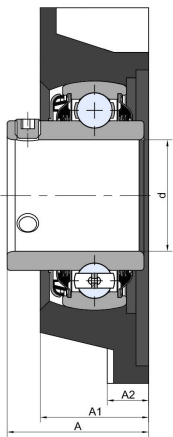

Основные размеры и рабочие параметры

d1	50mm	Bore diameter
A1	40mm	Total housing width
A1	16mm	Housing flange thickness
J	111mm	Distance between the holes
L	143mm	Total length
N	16mm	Hole diameter
A	54.6mm	Общая ширина
≈m	2.78Kg	weight
Cor	35.1Kn	Radial dynamic load rating
Cr	23.2Kn	Radial static load rating
Pu	0.974Kn	Fatigue load limit

*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。您可通过我们网站上的联系表了解更多信息。

Контакты: E-mail: mr.suo@zrbearing.net

Тел.: 0319-5628888

Адрес: Китай, пров. Хэбэй, уезд Линьси,
северная сторона кольцевой дороги Чэнбэй —
Zhongda Bearing