

**Z&R®**





## UCFN 210 2F-16MM

Agricultural machinery bearings

LEFN 210 2TB.H

## Техническая информация

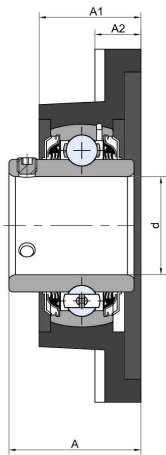

### Основные размеры и рабочие параметры

|     |         |                            |
|-----|---------|----------------------------|
| d1  | 50mm    | Bore diameter              |
| L   | 143mm   | Total length               |
| J   | 111mm   | Distance between the holes |
| N   | O 16H13 | Hole diameter              |
| A   | 54.6mm  | Общая ширина               |
| A1  | 40mm    | Total housing width        |
| A1  | 11mm    | Housing flange thickness   |
| B   | 51.6mm  | Width inner ring           |
| ≈ m | 2.6Kg   | weight                     |
| Cor | 23.2Kn  | Radial dynamic load rating |
| Cr  | 35.1Kn  | Radial static load rating  |
| Pu  | 0.974Kn | Fatigue load limit         |

\*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。 您可通过我们网站上的联系表了解更多信息。

Контакты: E-mail: [mr.suo@zrbearing.net](mailto:mr.suo@zrbearing.net)

Тел.: 0319-5628888

Адрес: Китай, пров. Хэбэй, уезд Линьси,  
северная сторона кольцевой дороги Чэнбэй —  
Zhongda Bearing