




## UCP 207-20 F

Plummer block housing unit P type, Cast iron housing, Set screw locking spherical ball bearing, F type seal

## Техническая информация

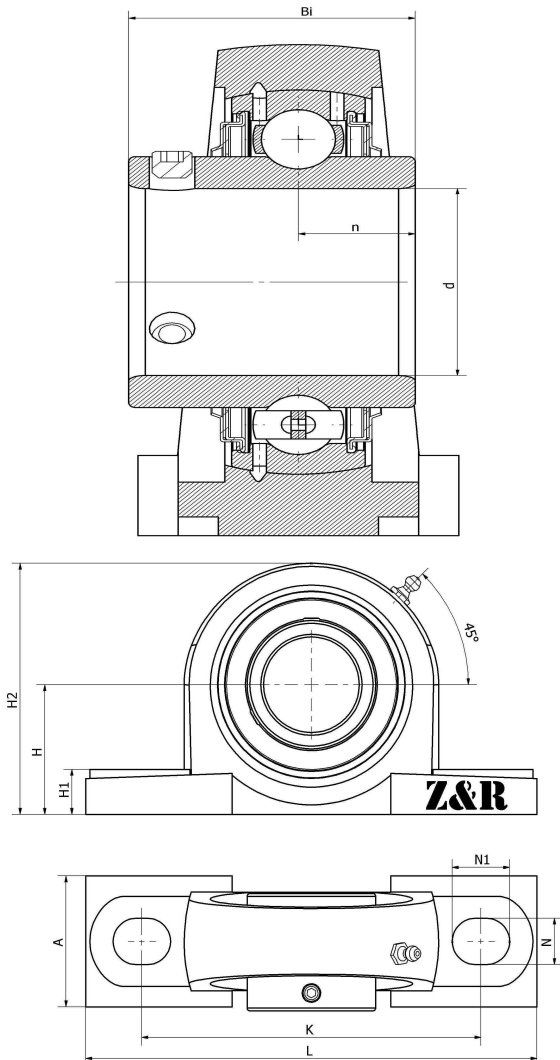

### Основные размеры и рабочие параметры

|     |          |                                |
|-----|----------|--------------------------------|
| d   | 31.75mm  | Внутренний диаметр (отверстие) |
| H   | 47.6mm   | Center height                  |
| H1  | 17mm     | Base height                    |
| H2  | 93mm     | Overall height                 |
| A   | 48mm     | Base width                     |
| N   | 17mm     | Mounting hole length           |
| N1  | 23mm     | Mounting hole width            |
| L   | 167mm    | Общая длина                    |
| K   | 127mm    | Fixed hole distance            |
| Bi  | 42.9mm   | Total width                    |
| n   | 17.5mm   | channel distance               |
|     | M14      | Bolt size                      |
| ≈ m | 1.53Kg   | weight                         |
|     | UC207-20 | Bearing Type                   |
|     | P207-20  | Bearing seat model             |
|     | M6*1     | Oil injection hole             |
|     | J6       | Assembly torque                |
|     | HT200    | Bearing seat material          |

\*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。您可通过我们网站上的联系表了解更多信息。