




UCT 316-50 F

Slider bearing housing unit T type, Cast iron housing, Set screw locking spherical ball bearing, T type seal

Техническая информация

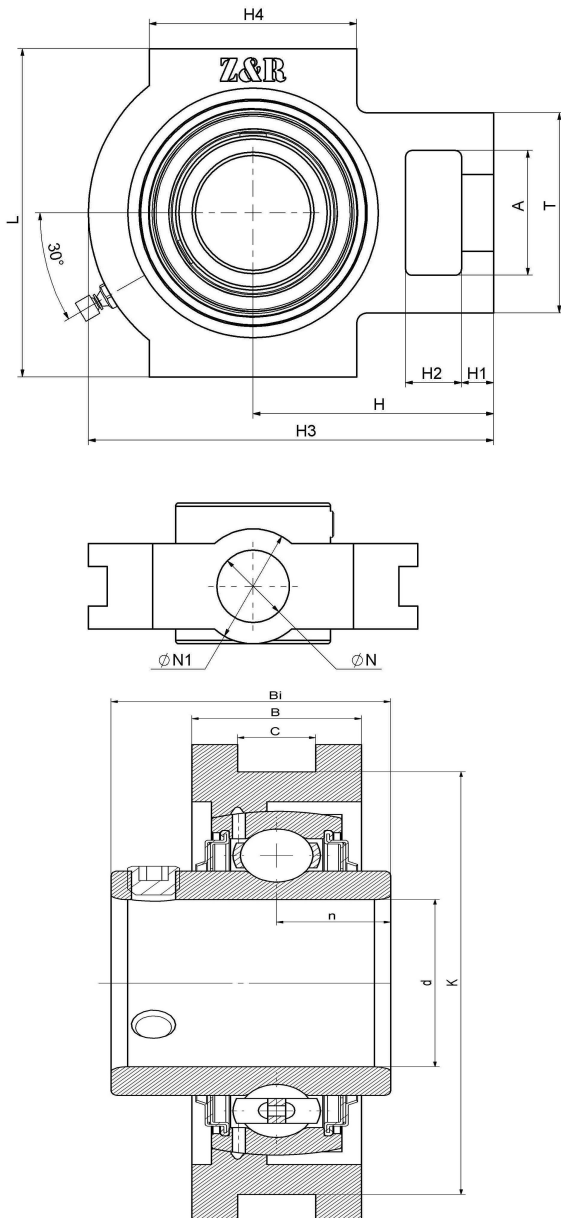

Основные размеры и рабочие параметры

d	79.375mm	Внутренний диаметр (отверстие)
K	204mm	Guide groove distance
L	230mm	Общая длина
T	150mm	Height of bearing seat fixed side
A	98mm	Pocket height
n	34mm	channel distance
C	30mm	Guide groove width
B	60mm	Bearing seat width
Bi	86mm	Total width
H4	160mm	Guide groove length
H3	282mm	Whole length
H2	42mm	Pocket width
H1	30mm	Fixed link length
H	174mm	Axis distance
N	53mm	Fixing holes
N1	102mm	Width of bearing seat fixed side
≈ m	15.8Kg	weight
UC316-50F	Bearing Type	
T316-50	Bearing seat model	
M6*1	Oil injection hole	
J7	Assembly torque	
HT200	Bearing seat material	

*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。您可通过我们网站上的联系表了解更多信息。

Контакты: E-mail: mr.suo@zrbearing.net

Тел.: 0319-5628888

Адрес: Китай, пров. Хэбэй, уезд Линьси,
северная сторона кольцевой дороги Чэнбэй —
Zhongda Bearing